

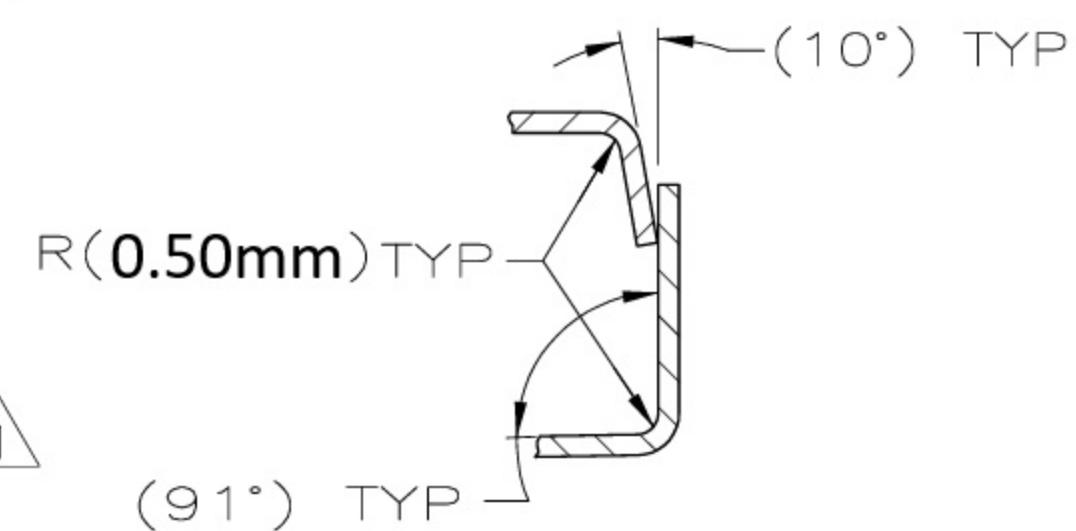
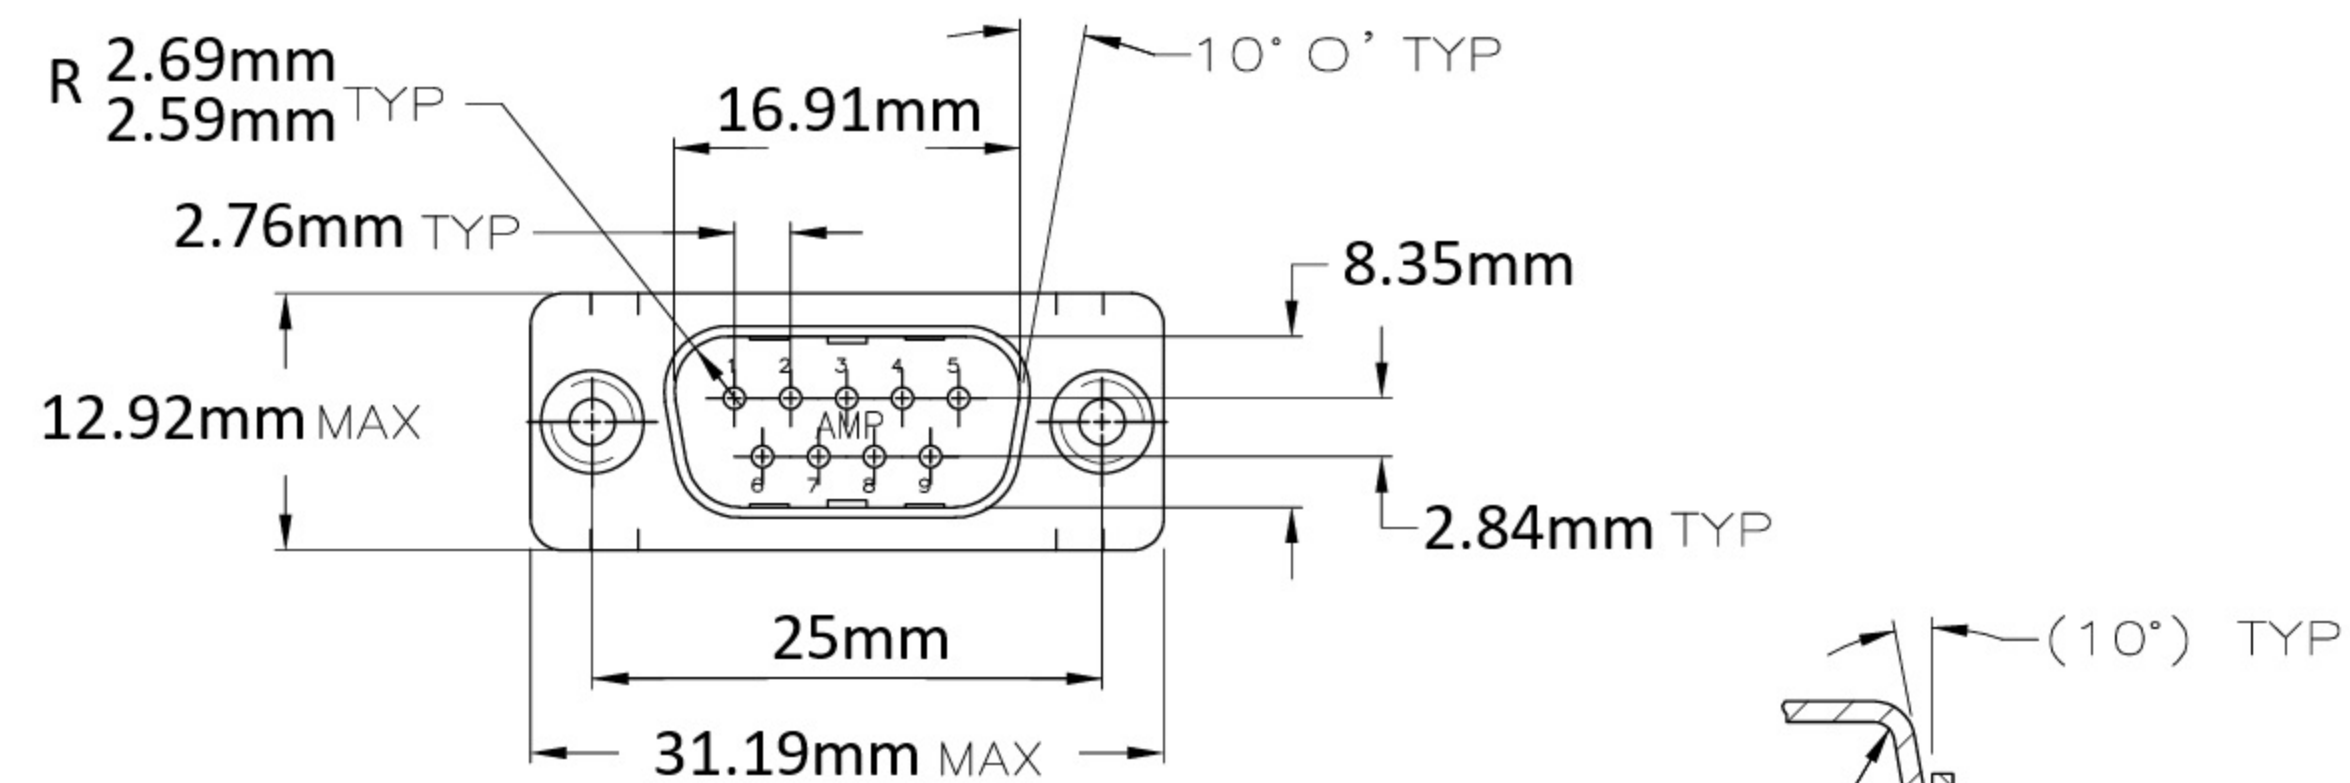
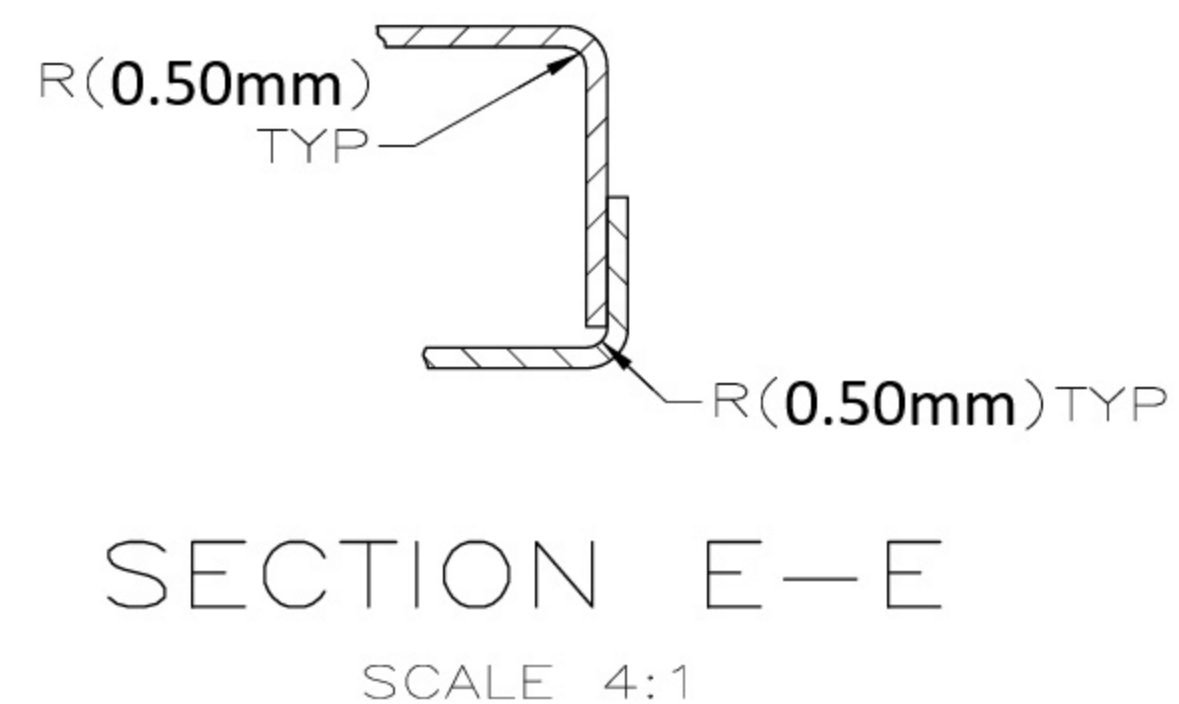


- ① PLUG ACCEPTS SIZE 20 PIN CONTACTS (CONTACTS MUST BE ORDERED SEPARATELY).
- ③ INSERT: FLAME RETARDANT, 94V-0 RATED, GLASS FILLED NYLON OR POLYESTER, BLACK.
- ④ SHELLS: .000200 MIN TIN PLATE OVER .000100 MIN COPPER UNDERPLATE.
- ⑤ SHELLS: STEEL PER ASTM A109.
- ⑥ SHIELDS: STAINLESS STEEL.

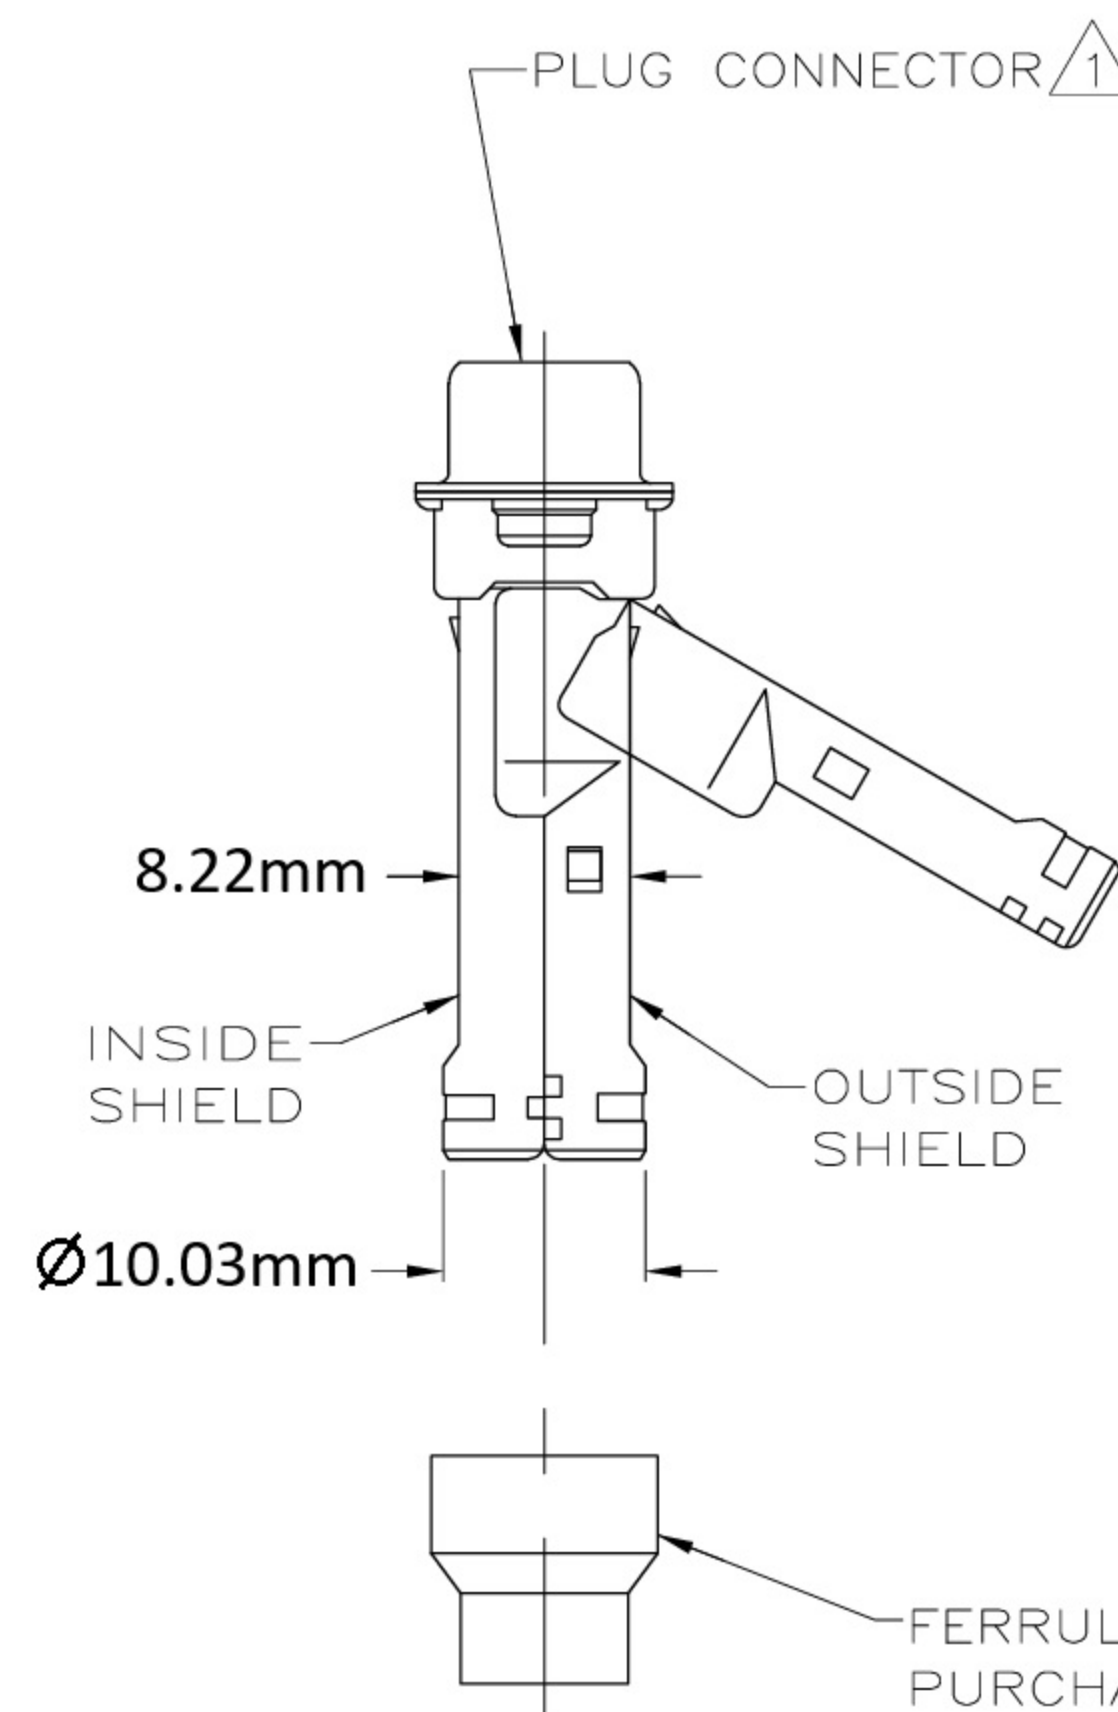

SECTION D-D
SCALE 4:1

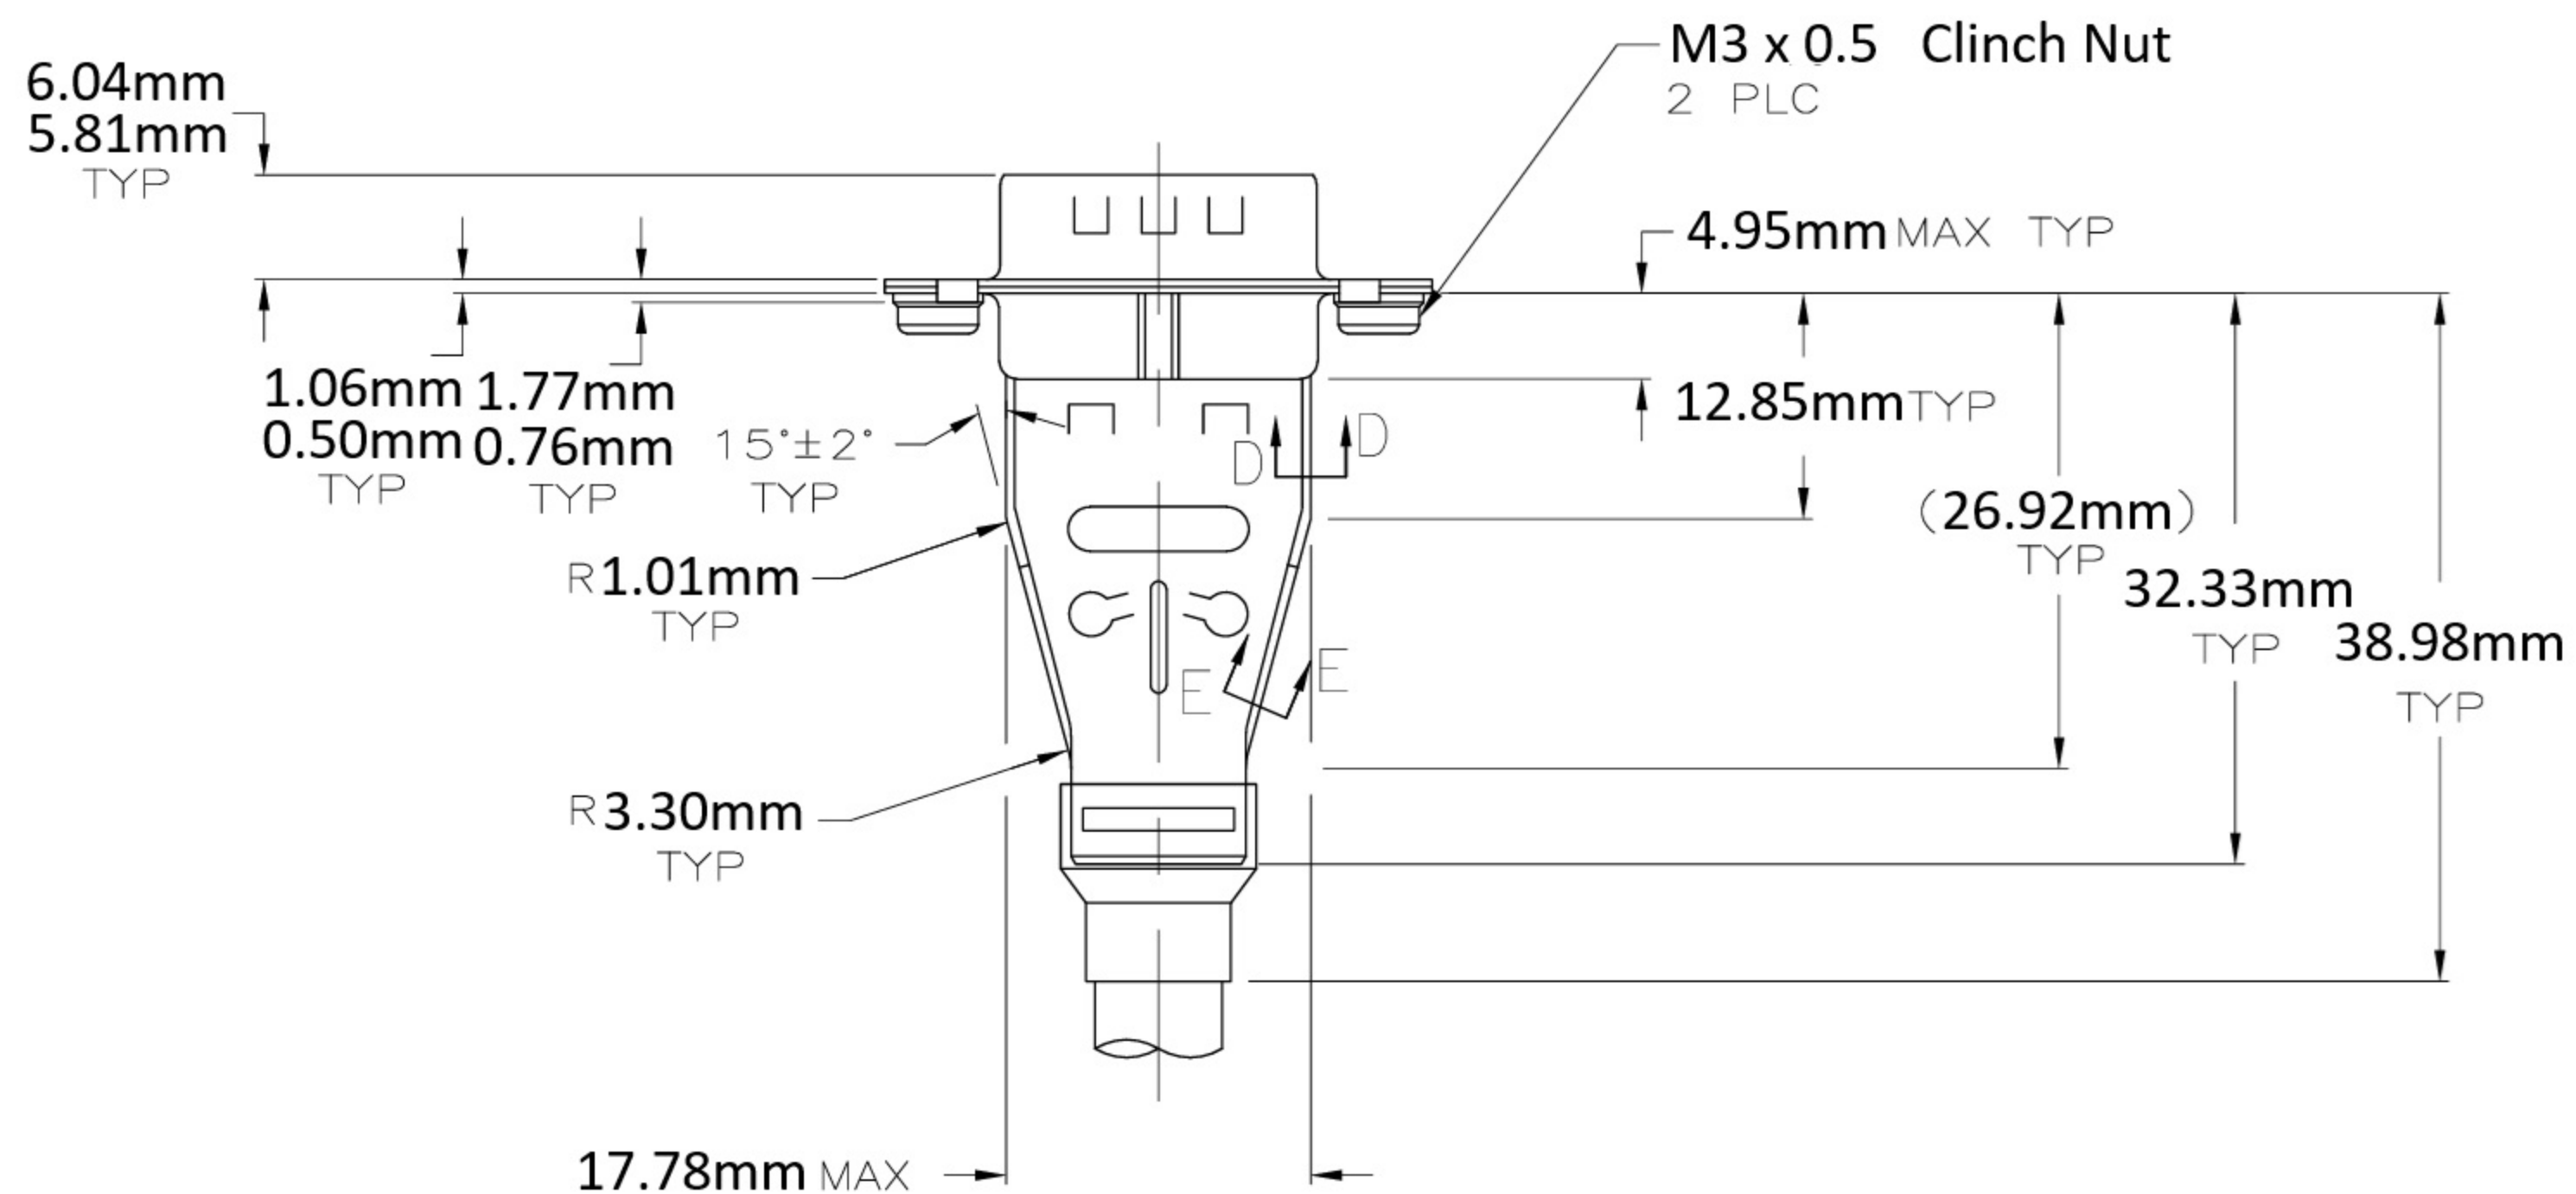

SECTION E-E
SCALE 4:1