


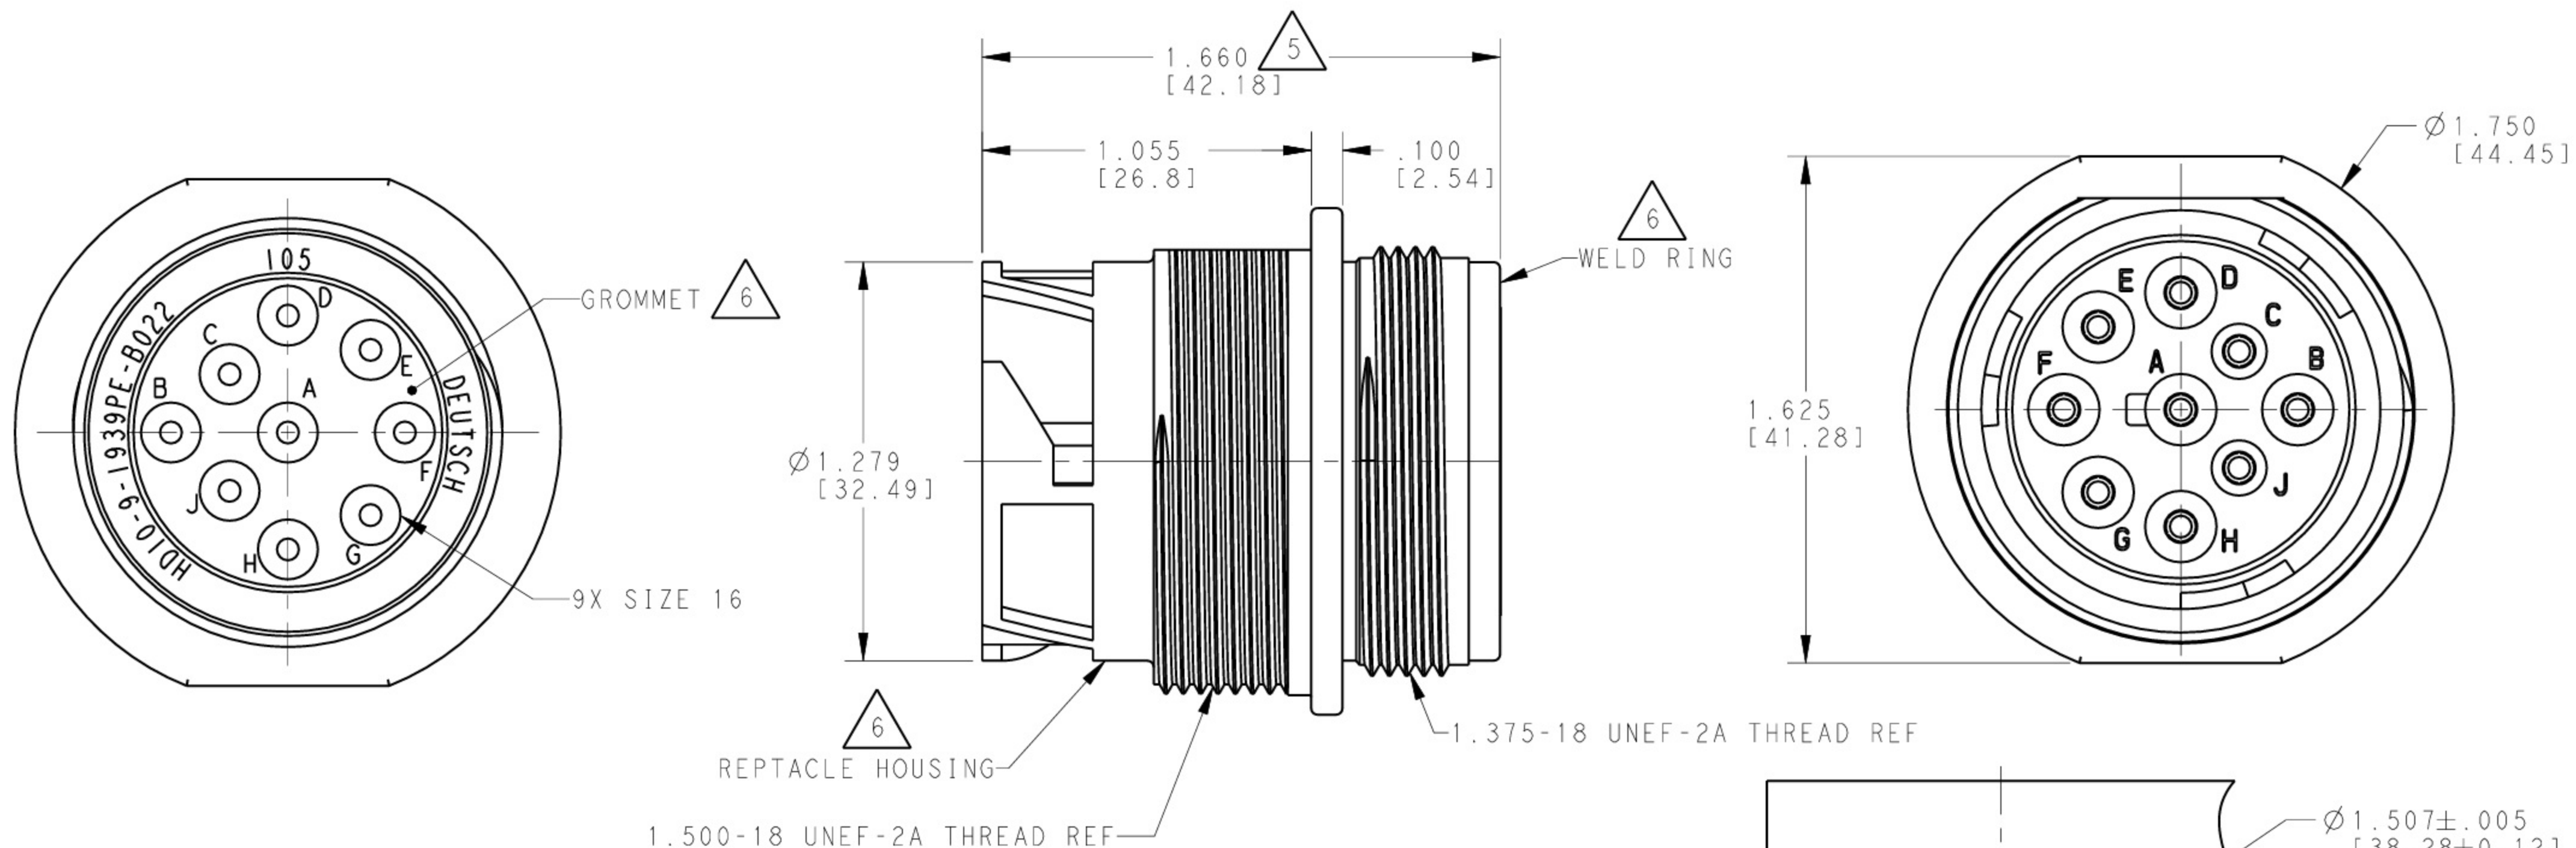

6 MATERIAL: RECEPTACLE HOUSING AND WELD RING: PA 15%GF (BLACK)
GROMMET: SILICONE (RED)

5 OVERALL DIMENSION DOES NOT INCLUDE RUBBER GROMMET.


3 SEE DRAWING 0425-015-0000 FOR CONTACT AND WIRE
PERFORMANCE AND APPLICATION CHARACTERISTICS.

2 RECOMMENDED PANEL THICKNESS: .062 [1.57] TO .188 [4.77].

1. SEE TABLE FOR USABLE WIRE RANGE AND INSULATION RANGES.

DIMENSIONS:	
INCHES [mm]	
MATERIAL	
6	

1.442^{+.010}_{-.000}
[36.63^{+.025}_{-.000}]

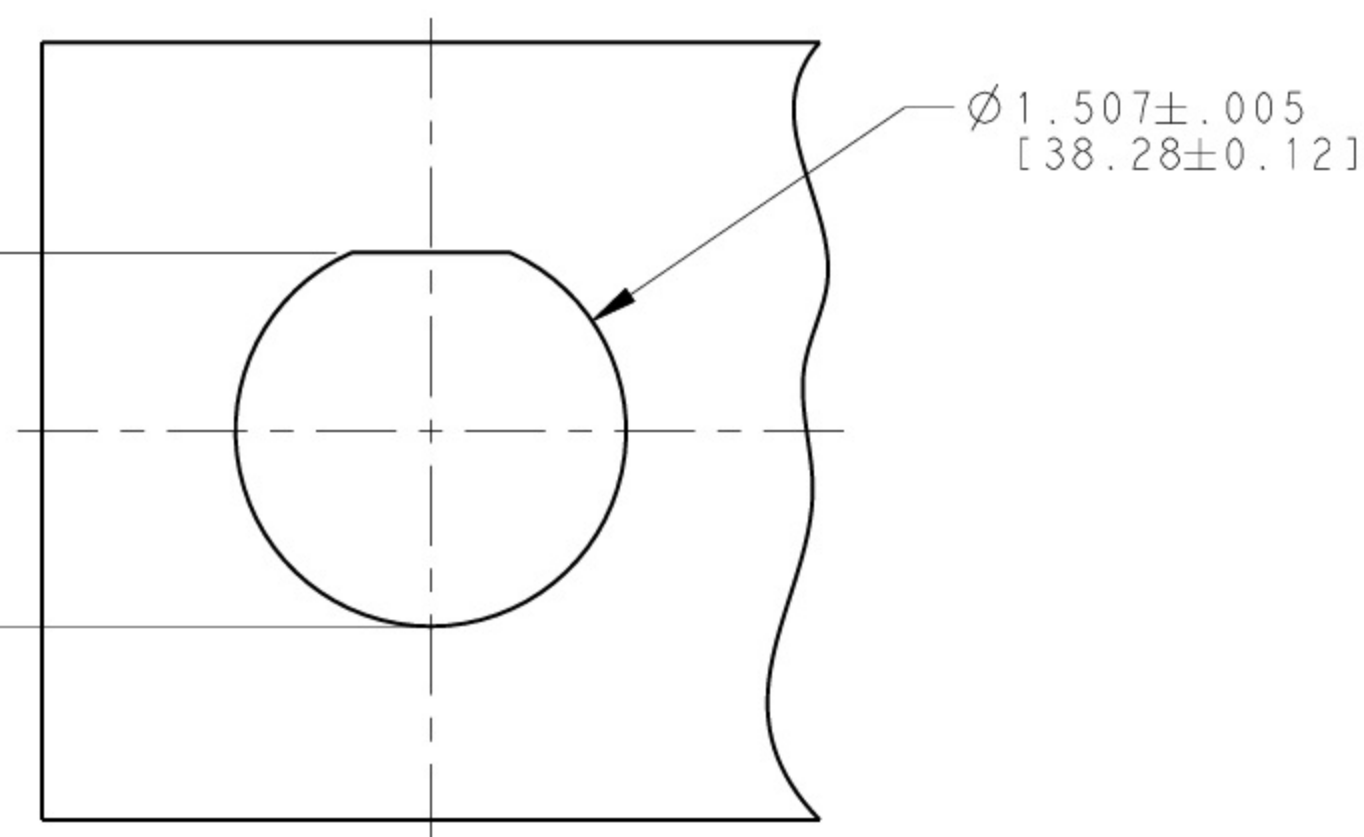

2 RECOMMENDED
MOUNTING HOLE

PART NUMBER	SEAL TYPE	CONTACT SIZE	MIN. INSUL. O.D.	MAX. INSUL. O.D.	WIRE RANGE [mm ²] 3
HD10-9-1939P-B022	NORMAL	16	.100 [2.54]	.150 [3.81]	14-18 AWG [2.0-.75]
HD10-9-1939PE-B022	E	16	.053 [1.35]	.120 [3.05]	14-20 AWG [2.0-.50]